


K50 SERIES FILLER

Level filler that is ideal for filling milk, juice, water and any non-carbonated low viscosity product



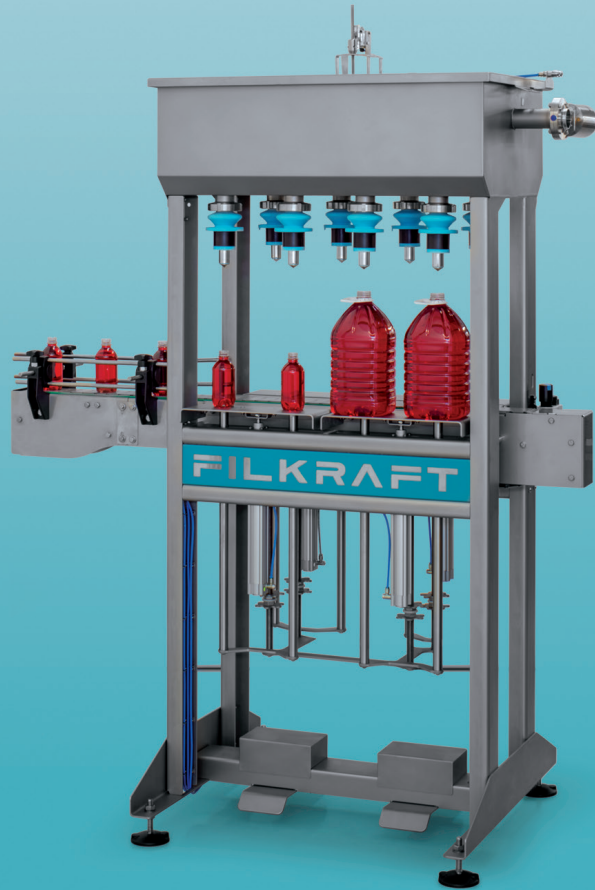

FEATURES

- Small footprint
- Filling valves have built in drip tray to avoid condensation from the filling tank to enter bottles
- Drive mechanism is maintenance free - no chains are used
- Machine has integrated discharge conveyor
- Product tank level control
- Ergonomic design to allow easy access to operator controls
- Machine Dimensions: 1300mm (L) X 850mm (W) X 2200mm (H)

K50 SERIES FILLING SPEEDS				
Container Size (ml)		500	2000	5000
K51	Bottles/min	20 - 25	15 - 20	8 - 13
	Bottles/hr	1200 - 1500	900 - 1200	480 - 780
K52	Bottles/min	40 - 50	30 - 40	15 - 25
	Bottles/hr	2400 - 3000	1800 - 2400	900 - 1500

Note: Filling speeds are for water and single strength juice. Speeds may vary depending on fill level, bottle shape and product viscosity.

FILKRAFT
PACKAGING & PROCESSING EQUIPMENT

+27 (0)21 204 8517 @ sales@filkraft.com  www.filkraft.com
 Filkraft, Unit 3, The Pearl, Zandwyk Park, Old Paarl Road, Paarl, 7646, South Africa